


Quetschkabelschuhe 95 – 240 mm² DIN 46234

Werkstoff: Cu-HCP

Oberfläche: galvanisch verzinkt

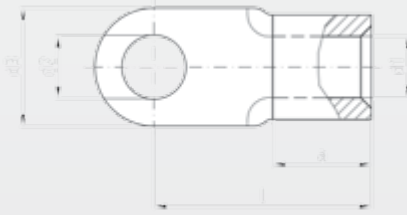

* nicht genormt

Querschnitt mm ²	Bohrung M	Bestell- Nummer	Maße in mm					Gewicht 100 Stk./kg	Verpackungs- Einheit (Stk.)	Werkzeuge hierzu
			d1	d2	d3	l	a			
95	8	41070	15	8,4	24	42	20	4,24	25	DP 6/95 Seite 138 AP 10 Seite 152, HPI 10 Seite 153, API 20 Seite 156, HPI 20 Seite 157 API 30 + HPI 30 Seite 161, HPW 17 Seite 163
	10	41071		10,5	24	42		4,17	25	
	12	41072		13	24	42		3,92	25	
	16	41073		17	28	44		3,94	25	
	20*	41074		21	32	51,8		4,25	25	
120	8	41075	16,5	8,4	24	44	22	5,77	25	
	10	41076		10,5	24	44		5,67	25	
	12	41077		13	24	44		5,42	25	
	16	41078		17	28	48		6,21	25	
	20*	41079		21	32	53	21	5,81	25	
150	10	41081	19	10,5	30	50	24	8,29	25	
	12	41082		13	30	50		8,31	25	
	16	41083		17	30	50		8,01	25	
	20*	41084		21	36	63	27	7,35	25	
185	10	41086	21	10,5	36	50	28	11,16	25	
	12	41087		13	36	50		10,78	25	
	16	41088		17	36	50		10,61	25	
	20*	41089		21	36	50		10,17	25	
240	10	41091	23,5	10,5	38	56	32	15,01	25	
	12	41092		13	38	56		14,98	25	
	16	41093		17	38	56		14,53	25	